

STAIRNOSING INSERTS

Compliance Requirements

AS1428.1-2009 – Design & Luminance Contrast

AS4586:2013 – Slip Rating

Stairnosing inserts can be used in conjunction with a stairnosing requiring a 50mm insert.

50mm Aluminium Tread Plate - P4 Slip Compliance


COLOUR	CODE	WIDTH	L/M - CTN
Black	MJ152/BL	3.66m	36.6
Silver	MJ152/SI	3.66m	36.6



BLACK / BL



SILVER / SI

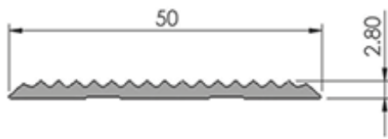

Luminance Reflectance Value		
Colour	Dry	Wet
Silver	71.94	69.17
Black	5.13	1.73

PVC Insert - P5 Slip Compliance

COLOUR	CODE	WIDTH	L/M - ROLL
Glow	50IL	50mm	25
Black	50SI/BL	50mm	25
Grey	50SI/GR	50mm	25
Yellow	50SI/YE	50mm	25



Grey / GR




Black / BL



Yellow / YE



Glow / IL

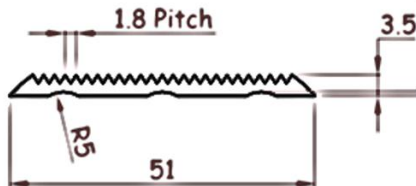

Luminance Reflectance Value		
Colour	Dry	Wet
Grey	17.48	17.57
Black	3.13	2.19
Yellow	47.22	45.05

Anti-Slip Tape - P5 Slip Compliance

COLOUR	CODE	WIDTH	L/M - ROLL
Black	ASAT5020/BL	50mm	20
Yellow	ASAT5020/YE	50mm	20



Luminance Reflectance Value		
Colour	Dry	Wet
Yellow	53.02	49.69
Black	2.66	2.58

Disclaimer: Whilst the above profiles comply to the above noted standards we recommend that the stairnosing selection is approved by the Project Certifier or Access Consultant prior to installation. It is the responsibility of the customer to confirm the compliance requirements for their project.

